





A Alert Alarm D112

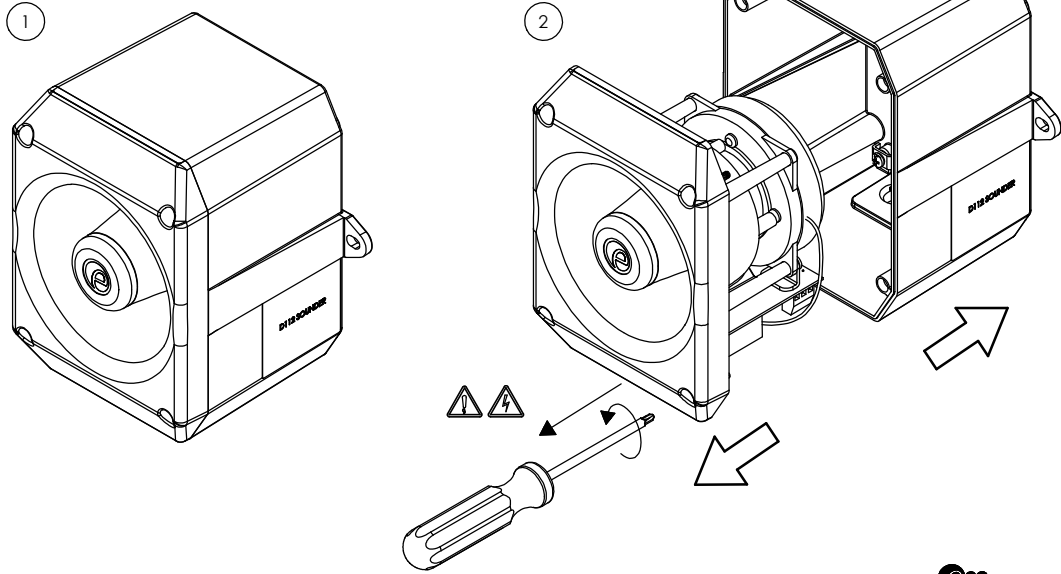

Tel : +44 (0)2 8743 8880 Fax : +44 (0)20 8740 4200
mail : sales@e2s.com web : www.e2s.com

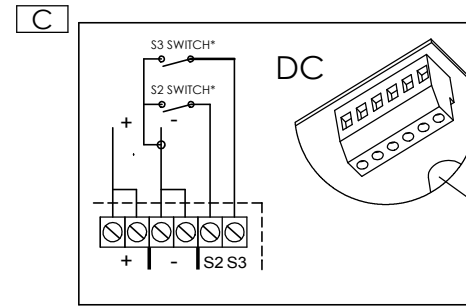


TERMINAL BLOCK	A/C INPUT	D/C INPUT
N/-	N~	-
L/+	L~	+
S2	SWITCH TO C	SWITCH TO -
S3	SWITCH TO C	SWITCH TO -

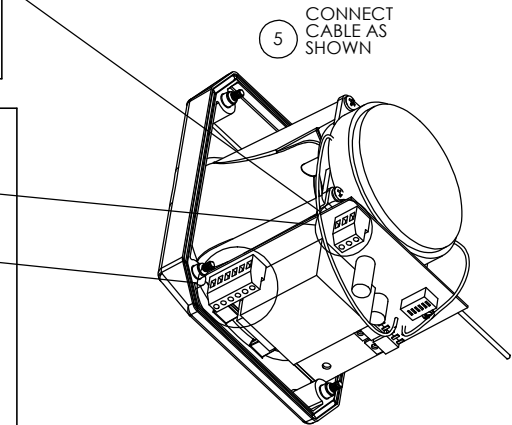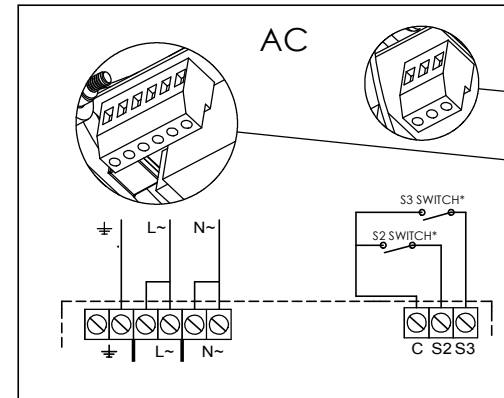

*S2 & S3 Denote Stage 2 & Stage 3 respectively
Stage switches are customer supplied



B

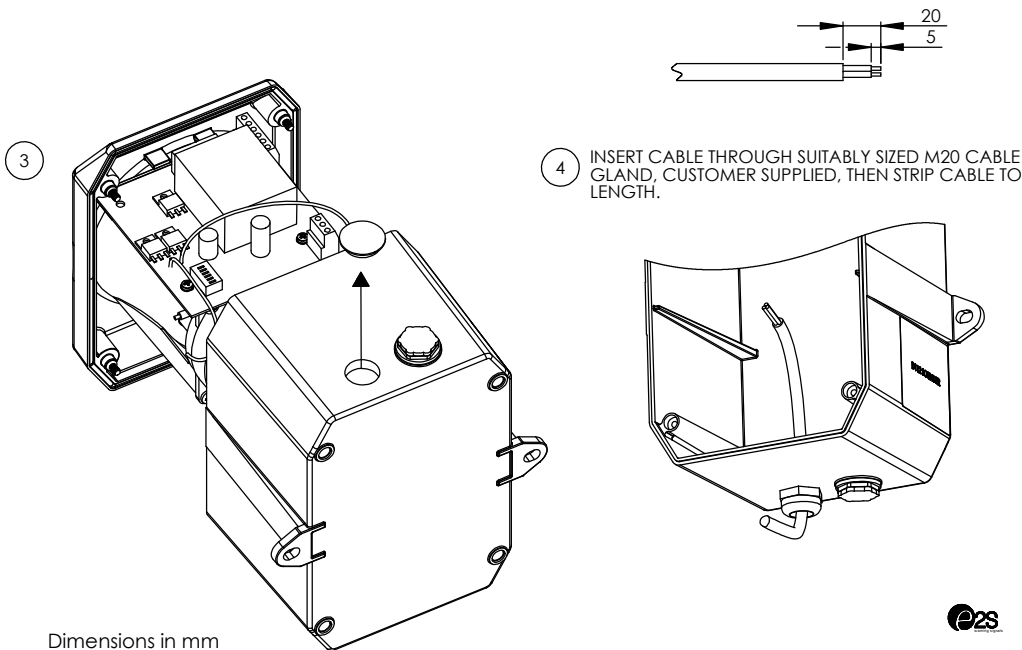


4 INSERT CABLE THROUGH SUITABLY SIZED M20 CABLE GLAND, CUSTOMER SUPPLIED, THEN STRIP CABLE TO LENGTH.

Dimensions in mm



D

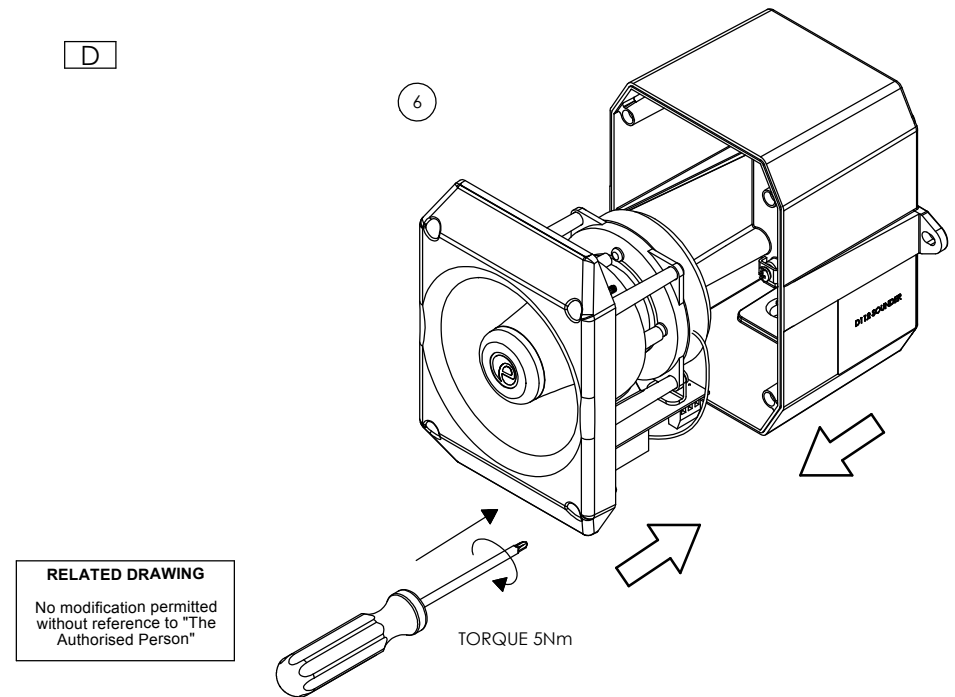

RELATED DRAWING
No modification permitted without reference to "The Authorised Person"

TORQUE 5Nm



A

Alert Alarm

D112 Metal Sounder
45 Selectable Tones & 3 Stages
Temp: -25°C to +55°C
Unit weight: ac = 2.1Kg; dc = 1.8Kg

D112

Dimensions : 180 x 130 x 125mm
1.5mm² terminals
Cable entry: 2-off M20 x 1.5mm
threaded holes.

CE
IP Rating: IP66

Order code	Voltage Range	Nominal Voltage	Nominal Current
D112DC024[X]	10-30 V dc	24 V dc	200mA
D112DC048[X]	35-60 V dc	48 V dc	120mA
D112AC024[X]	24 ±10% V ac	24 V ac	50mA
D112AC115[X]	115 ±10% V ac	115 V ac	100mA
D112AC230[X]	230 ±10% V ac	230 V ac	60mA

UL Approved units
IP Rating: Type 4 / 4X / 3R / 13, IP66

Order code	Voltage Range	Nominal Voltage	Nominal Current
D112DC024[X]-UL	10-30 V dc	24 V dc	200mA
D112DC048[X]-UL	35-60 V dc	48 V dc	120mA
D112AC024[X]-UL	24 ±10% V ac	24 V ac	50mA
D112AC115[X]-UL	115 ±10% V ac	115 V ac	100mA
D112AC230[X]-UL	230 ±10% V ac	230 V ac	60mA

[X] Denotes Body Colour: R = Red; G = Grey; D = Dark Grey
[Y] Denotes Lens Colour: A = Amber; B = Blue; C = Clear; G = Green; R = Red; Y = Yellow

Tel: +44 (0)2 8743 8880 Fax: +44 (0)20 8740 4200
mail: sales@e2s.com web: www.e2s.com



C

Table 1 - Tone Selection										
STAGE 1	FREQUENCY DESCRIPTION	Switch						Stage 2	Stage 3	Stage 4
Tone 1	340 Hz Continuous							Tone 17	Tone 5	Tone 29
Tone 2	800/1000Hz @ 0.25 sec Alternating							Tone 17	Tone 5	Tone 29
Tone 3	500/1200Hz @ 0.3Hz 0.5 sec Slow Whoop							Tone 2	Tone 5	Tone 29
Tone 4	800/1000Hz @ 1Hz Sw eeping							Tone 6	Tone 5	Tone 29
Tone 5	2400Hz Continuous							Tone 3	Tone 20	Tone 29
Tone 6	2400/2900Hz @ 7Hz Sw eeping							Tone 7	Tone 5	Tone 29
Tone 7	2400/2900Hz @ 1Hz Sw eeping							Tone 10	Tone 5	Tone 29
Tone 8	500/1200/500Hz @ 0.3Hz Sw eeping							Tone 2	Tone 5	Tone 29
Tone 9	1200/500Hz @ 1Hz - DIN / PFEER P.T.A.P.							Tone 15	Tone 2	Tone 29
Tone 10	2400/2900Hz @ 2Hz Alternating							Tone 7	Tone 5	Tone 29
Tone 11	1000Hz @ 1Hz Intermittent							Tone 2	Tone 5	Tone 29
Tone 12	800/1000Hz @ 0.875Hz Alternating							Tone 4	Tone 5	Tone 29
Tone 13	2400Hz @ 1Hz Intermittent							Tone 15	Tone 5	Tone 29
Tone 14	800Hz 0.25sec on, 1 sec off Intermittent							Tone 4	Tone 5	Tone 29
Tone 15	800Hz Continuous							Tone 2	Tone 5	Tone 29
Tone 16	660Hz 150mS on, 150mS off Intermittent							Tone 18	Tone 5	Tone 29
Tone 17	544Hz (100mS)/440Hz (400mS) - NF S 32-001							Tone 2	Tone 27	Tone 29
Tone 18	660Hz 1.8sec on, 1.8sec off Intermittent							Tone 2	Tone 5	Tone 29
Tone 19	1.4KHz-1.6KHz 1s, 1.6KHz-1.4KHz 0.5s -NFC48-265							Tone 2	Tone 5	Tone 29
Tone 20	660Hz Continuous							Tone 2	Tone 5	Tone 29
Tone 21	554Hz/440Hz @ 1Hz Alternating							Tone 2	Tone 5	Tone 29
Tone 22	544Hz @ 0.875 sec. Intermittent							Tone 2	Tone 5	Tone 29
Tone 23	800Hz @ 2Hz Intermittent							Tone 6	Tone 5	Tone 29
Tone 24	800/1000Hz @ 50Hz Sw eeping							Tone 29	Tone 5	Tone 29
Tone 25	2400/2900Hz @ 50Hz Sw eeping							Tone 29	Tone 5	Tone 29
Tone 26	Bell							Tone 2	Tone 15	Tone 29
Tone 27	554Hz Continuous							Tone 26	Tone 5	Tone 29
Tone 28	440Hz Continuous							Tone 2	Tone 5	Tone 29
Tone 29	800/1000Hz @ 7Hz Sw eeping							Tone 7	Tone 5	Tone 29
Tone 30	300Hz Continuous							Tone 2	Tone 5	Tone 29
Tone 31	660/1200Hz @ 1Hz Sw eeping							Tone 26	Tone 5	Tone 29
Tone 32	Two tone chime.							Tone 26	Tone 15	Tone 29
Tone 33	745Hz @ 1Hz Intermittent							Tone 2	Tone 5	Tone 29
Tone 34	1000 & 2000Hz @ 0.5 sec Alternating - Singapore							Tone 38	Tone 45	Tone 29
Tone 35	420Hz @ 0.625 sec Australian Alert							Tone 36	Tone 5	Tone 29
Tone 36	500-1200Hz 3.75sec /0.25sec. Australian Evac.							Tone 35	Tone 5	Tone 29
Tone 37	1000Hz Continuous - PFEER Toxic Gas							Tone 9	Tone 45	Tone 29
Tone 38	2000Hz Continuous							Tone 34	Tone 45	Tone 29
Tone 39	800Hz 0.25sec on, 1 sec off Intermittent							Tone 23	Tone 17	Tone 29
Tone 40	544Hz (100mS)/440Hz (400mS) - NF S 32-001							Tone 31	Tone 27	Tone 29
Tone 41	Motor Siren - slow rise to 1200 Hz							Tone 2	Tone 5	Tone 29
Tone 42	Motor Siren - slow rise to 800 Hz							Tone 2	Tone 5	Tone 29
Tone 43	1200 Hz Continuous							Tone 2	Tone 5	Tone 29
Tone 44	Motor Siren - slow rise to 2400 Hz							Tone 2	Tone 5	Tone 29
Tone 45	1KHz 1s on, 1s off Intermittent - PFEER Gen. Alarm							Tone 38	Tone 34	Tone 29


NOTE: Please check factory settings and ensure the correct alarm tone is selected for your country or application

Tone Selection / Switch Setting - Switch settings are shown in the tone selection table. Black squares are the switch levers in the ON positions

Reverse Polarity Switching - On DC versions the second stage alarm tone can be selected by reversing the polarity of the supply voltage if switch 6 is in the ON position if Link LK3 is present.

DC CIRCUIT

AC CIRCUIT

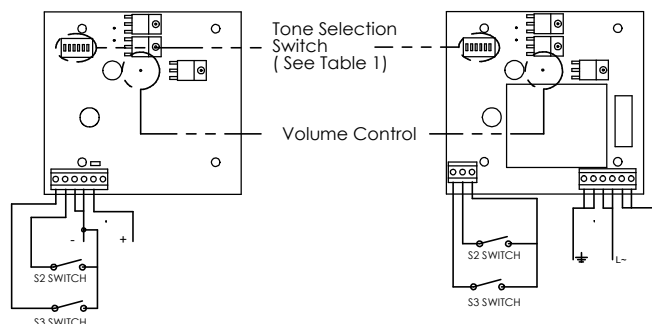

RELATED DRAWING

No modification permitted without reference to "The Authorised Person"



D173-00-001-4S_SHT1_ISSUE_1

