

Spectra arm AB121STR

Sounder unit A121

Maximum output: 126 dB(A) @ 1 m

Nominal output: 121 dB(A) @ 1 m - tone 2

45 alarm tones (UKO OAV/PFEER compliant)

Xenon Strobe Flashing Beacon

15J @ 1Hz

3 Selectable user modes

IP Rating: IP65

Temp: -25°C to +50°C

Unit weight: 2.8kg DC 3.4kg AC

CE

Dimensions : 190mm(w) x 390mm(h)

1.5mm² terminals

For Lens colour options

x = in order code to be replaced with required lens colour

R = Red A = Amber

B = Blue C = Clear

G = Green Y = Yellow

Y = in order code to be replaced with required housing colour

G = Grey R = Red



ATTENTION: Installation must be carried out by an electrician in compliance with the latest codes and regulations.



ATTENTION: Disconnect from power source before installation or service to prevent electric shock.



ATTENTION: On strobe beacons allow a minimum of 2 minutes for hazardous high voltage to discharge from unit.



ATTENTION: Lens on unit will be hot allow to cool prior to removal.

Order code

Nominal voltage range

AB121STRDC24Y/x 24VDC (18-30VDC)

Beacon 870mA Sounder 950mA @ 24VDC

AB121STRDC48Y/x 48VDC (36-60VDC)

Beacon 480mA Sounder 600mA @ 48VDC

AB121STRAC115Y/x 115VAC (103-127VAC)

Beacon 400mA Sounder 240mA @ 115VAC

AB121STRAC230Y/x 230VAC (207-253VAC)

Beacon 225mA Sounder 120mA @ 230VAC

Example:- AB121STRDC24G/R

This example is for a

A121 sounder with strobe beacon

running on 24VDC

the housing is grey with a red lens.

2

AB121STR Sounder Tone Settings Table

For switch settings please note:-

Where 1 is indicated the switch

position is on.


Where 0 is indicated the switch

position is off.

Example:-


Table shows 1 0 0 0 0 0 0

Switch setting On Off Off Off Off



Stage 1	Frequency Description	Switch 1 2 3 4 5 6	Stage 2	Stage 3
1	340Hz Continuous	0 0 0 0 0 0	Tone 2	Tone 5
2	800/1000Hz @ 0.25 sec Alternating	1 0 0 0 0 0	Tone 17	Tone 5
3	500/1200Hz @ 0.3Hz sec Slow Whoop	0 1 0 0 0 0	Tone 2	Tone 5
4	800/1000Hz @ 1Hz Sweeping	1 1 0 0 0 0	Tone 6	Tone 5
5	2400Hz Continuous	0 0 1 0 0 0	Tone 3	Tone 20
6	2400/2900Hz @ 7Hz Sweeping	1 0 1 0 0 0	Tone 7	Tone 5
7	2400/2900Hz @ 1Hz Sweeping	0 1 1 0 0 0	Tone 10	Tone 5
8	500/1200/500Hz @ 0.3Hz Sweeping	1 1 1 0 0 0	Tone 2	Tone 5
9	1200/500Hz @ 1Hz - DIN PFEER F-1,A,P	0 0 0 1 0 0	Tone 15	Tone 2
10	2400/2900Hz @ 2Hz Alternating	1 0 0 1 0 0	Tone 7	Tone 5
11	1000Hz @ 1Hz Intermitent	0 1 0 1 0 0	Tone 2	Tone 5
12	800/1000Hz @ 0.875Hz Alternating	1 1 0 1 0 0	Tone 4	Tone 5
13	2400Hz @ 1Hz Intermitent	0 0 1 1 0 0	Tone 15	Tone 5
14	800Hz @ 0.25 sec on, 1 sec off Intermitent	1 0 1 1 0 0	Tone 4	Tone 5
15	800Hz Continuous	0 1 1 1 0 0	Tone 2	Tone 5
16	660Hz 150ms on, 150ms off Intermitent	1 1 1 1 0 0	Tone 18	Tone 5
17	544Hz (100ms)/440 Hz (400ms) - NF S 32-001	0 0 0 0 1 0	Tone 2	Tone 27
18	660Hz 1.8 sec on, 1.8 sec off Intermitent	1 0 0 0 1 0	Tone 2	Tone 5
19	1.4kHz - 1.8kHz 1s, 1.8kHz - 1.4 kHz 0.5s - NF C8-285	0 1 0 0 1 0	Tone 2	Tone 5
20	660Hz Continuous	1 1 0 0 1 0	Tone 2	Tone 5
21	554Hz/440Hz @ 1Hz Alternating	0 0 1 0 1 0	Tone 2	Tone 5
22	544Hz @ 0.875 sec Intermitent	1 0 1 0 1 0	Tone 2	Tone 5
23	800Hz @ 2Hz Intermitent	0 1 1 0 1 0	Tone 6	Tone 5
24	800/1000Hz @ 50Hz Sweeping	1 1 1 0 1 0	Tone 29	Tone 5
25	2400/2900Hz @ 50Hz Sweeping	0 0 0 1 1 0	Tone 29	Tone 5
26	Bell	1 0 0 1 1 0	Tone 2	Tone 15
27	554Hz Continuous	0 1 0 1 1 0	Tone 26	Tone 5
28	440Hz Continuous	1 1 0 1 1 0	Tone 2	Tone 5
29	800/1000Hz @ 7Hz Sweeping	0 0 1 1 1 0	Tone 7	Tone 5
30	300Hz Continuous	1 0 1 1 1 0	Tone 2	Tone 5
31	660/1200Hz @ 1Hz Sweeping	0 1 1 1 1 0	Tone 26	Tone 5
32	Two tone chime	1 1 1 1 1 0	Tone 26	Tone 15
33	745Hz @ 1Hz Intermitent	0 0 0 0 0 1	Tone 2	Tone 5
34	1000 & 2000Hz @ 0.5 sec Alternating - Singapore	1 0 0 0 0 1	Tone 38	Tone 45
35	420Hz @ 0.625 Sec Australian Alert	0 1 0 0 0 1	Tone 36	Tone 5
36	500-1200Hz 3.75 sec /0.25 sec Australian Eval.	1 1 0 0 0 1	Tone 35	Tone 5
37	1000Hz Continuous - PFEER Toxic Gas	0 0 1 0 0 1	Tone 9	Tone 45
38	2000Hz Continuous	1 0 1 0 0 1	Tone 34	Tone 45
39	800Hz 0.25 sec on, 1 sec off Intermitent	0 1 1 0 0 1	Tone 23	Tone 17
40	544Hz (100ms)/440Hz (400ms) - NF S 32-001	1 1 1 0 0 1	Tone 31	Tone 27
41	Motor Siren - slow rise to 1200Hz	0 0 0 1 0 1	Tone 2	Tone 5
42	Motor Siren - slow rise to 800Hz	1 0 0 1 0 1	Tone 2	Tone 5
43	1200Hz Continuous	0 1 0 1 0 1	Tone 2	Tone 5
44	Motor Siren - slow rise to 2400Hz	1 1 0 1 0 1	Tone 2	Tone 5
45	1kHz 1s on, 1s off Intermitent - PFEER Gen. Alarm	0 0 1 1 0 1	Tone 38	Tone 34

AB121STR Strobe Option Settings Table





Dual Flash 15J + 10J @ 0.75Hz

Single Flash 15J @ 1Hz

Triple Flash 15J + 10J + 10J @ 0.5Hz



A Spectra Alarm AB121STR

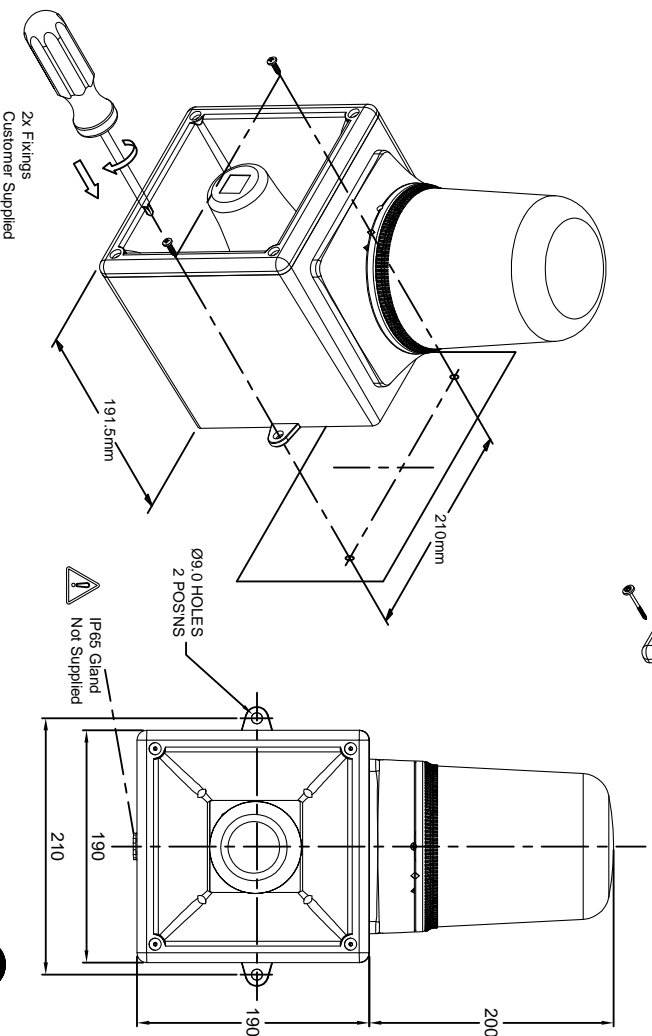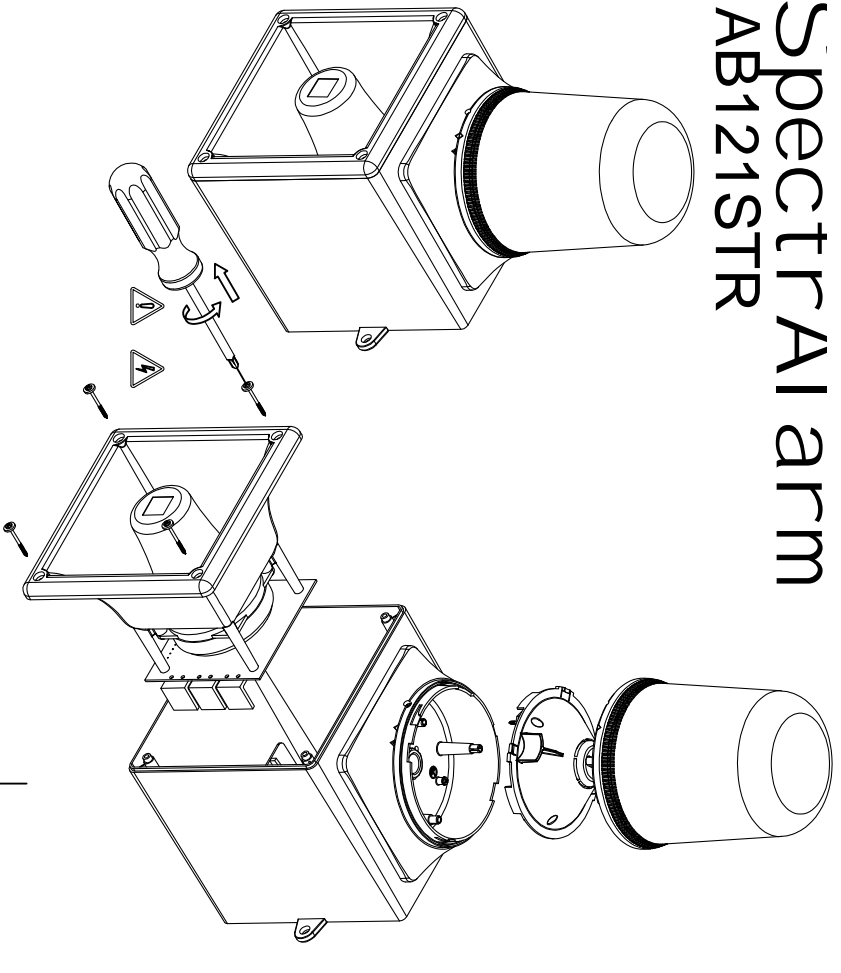


Dimensions in mm


Tel : +44(0)20 8743 8980 Fax : +44(0)2 8740 4200
 mail : sales@e2s.com Web : www.e2s.com



B

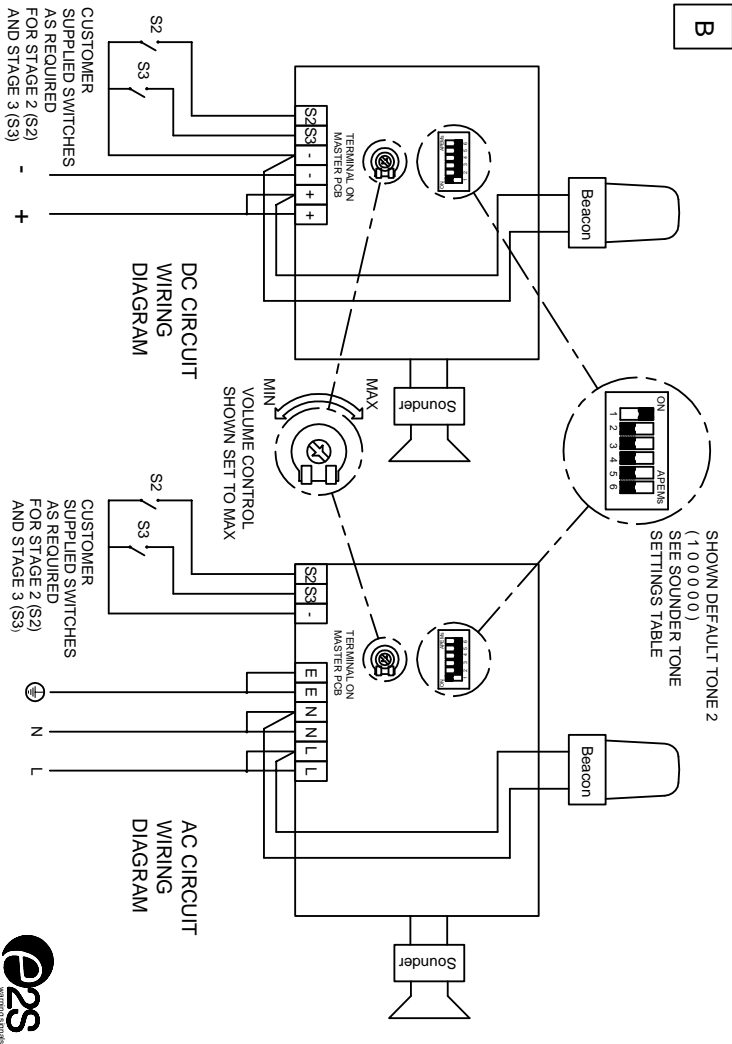

C

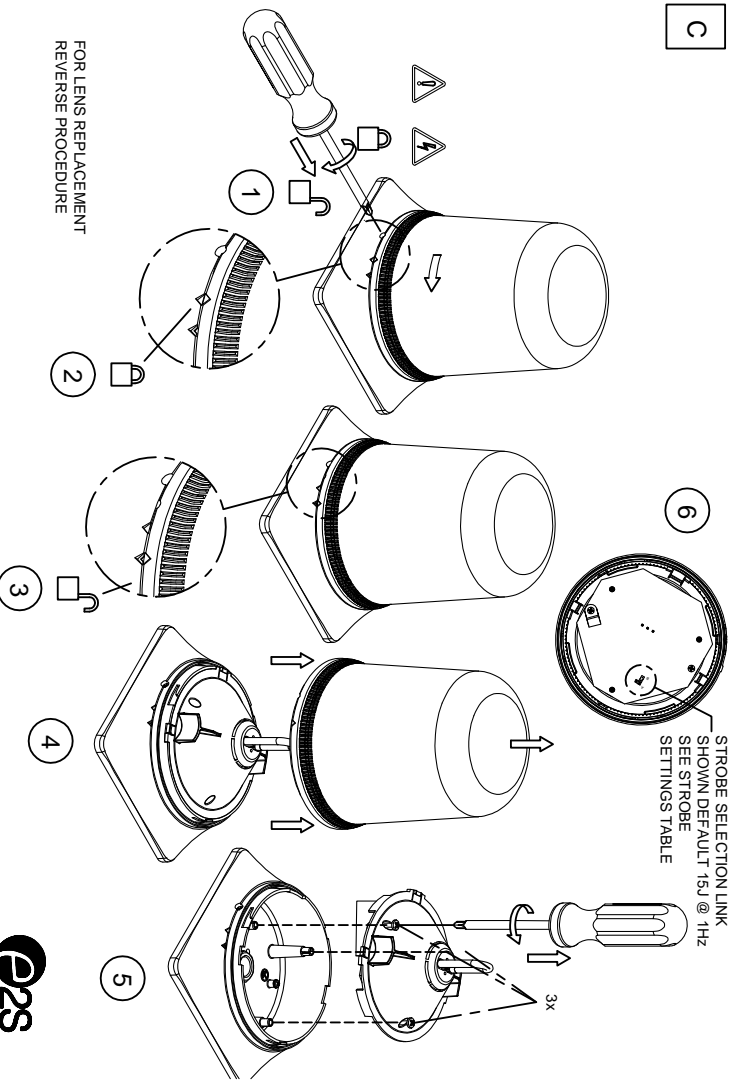

FOR LENS REPLACEMENT
 REVERSE PROCEDURE

D128-00-001-IS_SHT2_ISSUE_A

