

# B200SLF Status Beacon [Filament Lamp]

The B200 series is comprised of a Xenon strobe beacon, permanent filament bulb, blinking filament bulb and a permanent LED array beacon version.

The surface mount base can also be supplied with a right angle bracket or with a pole mounted assembly.

## Part codes:

Version:	Wattage:	Part code:
12-250V	5W	B200SLF250B/[x]

[x] = Lens colour:

A: Amber  
 B: Blue  
 C: Clear  
 G: Green  
 R: Red  
 Y: Yellow

## Features:

- Bayonet fixing lens.
- Anti-tamper locking screw.
- Stainless steel fixings.




NOTE: Filament lamps not included.

## Bulb/lamp part codes:

Voltage:	Wattage:	Type:	Part code:
12V dc	5W	BA9s	BR10125B
24V dc	5W	BA9s	BR10245B
48V dc	5W	BA9s	BR10485B
115V ac	5W	BA9s	BR101305B
230V ac	5W	BA9s	BR102305B

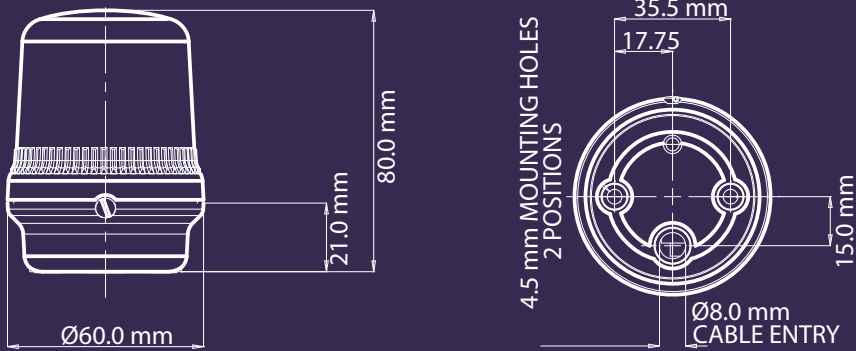

**Specification:**

Light source:	Filament lamp BA9s
Light output:	5W
Function:	Permanent
Peak/Effective Intensity cd:	5 cd*
Lens colours:	Amber, Blue, Clear, Green, Red & Yellow
Lens type:	Prismatic (standard) or plain
Mounting:	Surface mount (right angle or pole mount accessories available)
Ingress protection:	IP65
Housing/lens material:	High impact UL94 V0 (f1) PC
Terminals:	0.5 to 1.5mm <sup>2</sup>
Operating temperature:	-25 to +50°C
Storage temperature:	-40 to +70°C
Relative humidity:	90% at 20°C.
Weight :	78g

\*Candela measurements representative of performance with clear lens at optimum voltage.

**Accessories:**

B200RAB001  
Wall bracket



B200TMA001  
Pole mount assembly  
(140mm)

