
NEW





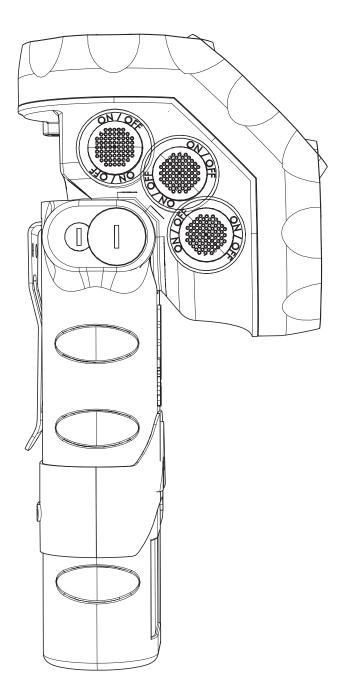

Torch

ATEX Certificate LOM 12ATEX2087 X

II 1G Ex ia IIC T4 Ga | II 1D Ex ia IIIC T85 °C Da

Ingress Protection: IP67

Weight: 500 g

Measures: 225 x 70 mm (L x Diam. Ø)

Burning Time System

3 different intensity levels that can be chosen by the user in order to choose the correct burning time in every moment with a minimun of 4 hours use of maximum intensity, 6 in the intermediate and 8 hours at the minimum.

Burning time

Real time in hours and minutes thanks to the digital display.

Low Battery Warning

Blinking signal of the main LED 15 min. before the batteries get off.

Material

High resistance thermoplastic resin to the impacts, extreme temperatures and corrosive substances. Two button switches of soft touch material, ergonomic and oversized in order to guarantee easy pushing.

Swivelling Head

3 positions: 0° / 45° / 90°.

Lighting Source:

3 high intensity LED's with 135 lm. | Total light intensity 300 lm.

LEDEngine Power Optic

FOCUSED light on: BOOSTER function to illuminate long distances with a greater penetrating light beam.

FLOOD Light on: Unique "step lighting system" to light the ground area just ahead user's feet.

Battery: Type: Lithium | Voltage: 3,7 V.

Accesories: Holster, Nylon with high visibility.

Magnet with high pull strenth.

Chargers

Marking: CE e9

Ingress Protection: IP54

Disconnection at the end of the charge: Automatic

Charge indication: Red LED: charging | Green LED: charged

Feeding source: DC: 12/24 V. | AC: 100/240 V. 50/60 Hz

Type and Dimensions:

Individual: 75x105x60 mm.

Charging rack for 3 torches: 205x105x60 mm. Charging rack for 5 torches: 405x105x60 mm























ADARO Tecnología, S.A. Parque Científico y Tecnológico de Gijón -EDIFICIO ADARO-33203 GIJÓN-ASTURIAS

> Customer Service: Tel.: +34 985 347 806 Fax: +34 985 347 827 info@adalit.es