Multifunction handle
// TG-W GR x S Order no.: 97755904

Features/Options

- Grey start push-button: 1NO contact
- Green and red LED
- Green enabling push-button: 1 change-over contact
- Protection class IP 65
- With plug-in connector M12 x 1, 8-poles

Dimensions

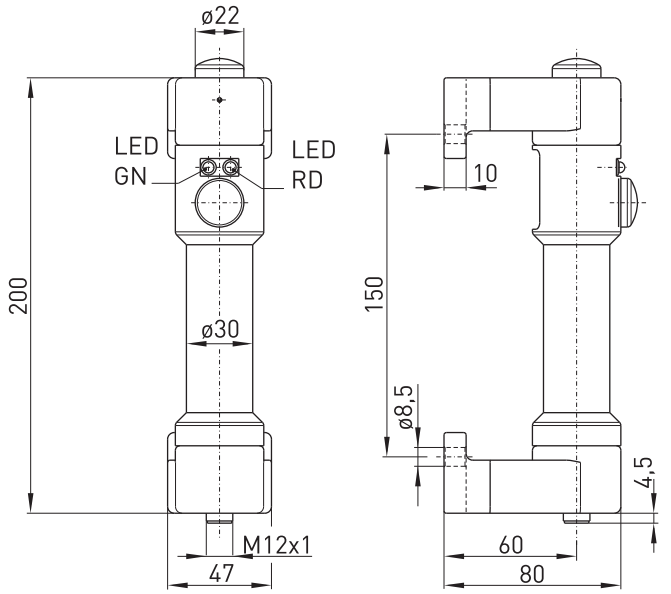

Technical data

Standards	IEC/EN 60947-5-1
Enclosure	Glassfibre reinforced, shockproof thermoplastic, POM
Protection class	IP 65 per IEC/EN 60529
Termination	Plug-in connector, A-coded
U_e LEDs	max. 24VDC +10%
U_c	0,1 VAC/DC ... 25VAC/42VDC
Rated switching current	max. 0,1 A AC/DC
Rated switching capacity	max. 0,6 W
Degree of pollution	3
Mechanical life	> 1 milion operations
Ambient temperature	-25 ... +55 °C

Errors and omissions excepted.

Contact variants

TG-W GR x S

LEDs



LEDs
Enabling push-button

Plug-in configuration (view from plug side)



Plug-in configuration (view from plug side)
Start push-button



steute Schaltgeräte GmbH & Co. KG | Brückenstraße 91 32584 Löhne, Germany | Telefon +49 (0) 5731 745-0 Telefax +49 (0) 5731 745-200 | info@steute.com www.steute.com