


## Multifunction handle AS-Interface // TG-S GR xx-A Order no.: 97955910

### Features/Options

- Green enabling push-button
- Green and red LED

- Protection class IP 65
- With plug-in connector M12 x 1, 4-poles, A-coded

### Dimensions

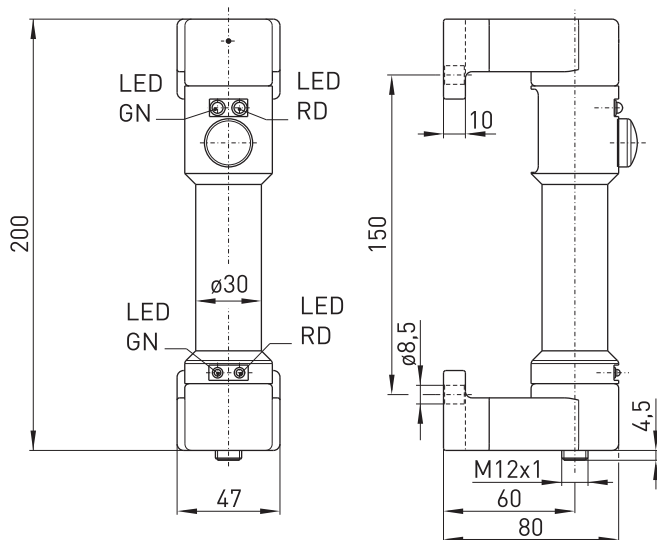

### Technical data

Standards	IEC/EN 60947-5-1
Enclosure	Glassfibre reinforced, shockproof thermoplastic, POM
Protection class	IP 65 per IEC/EN 60529
operating voltage range	26,5V - 31,6V DC
standby current	< 25 mA
max. operating current	> 100 mA
Termination	Plug-in connector, A-coded
Degree of pollution	3
Mechanical life	> 1 million operations
Ambient temperature	-25 ... +55 °C

Errors and omissions excepted.