LUMENOX



LFX3 High Output LED Explosion-Proof Floodlight

Overview

The LFX3 is a high output, robust and reliable LED floodlight for use in oil & gas, petro-chemical, aviation, marine and utility applications.

Suitable for use in Zones 1,2,21 & 22, weatherproof to IP66 and with a robust LM6 alloy housing, the LFX3 is suitable for use in the harshest environments. Utilising high output LED light engines, the LFX3 provides excellent illumination while running very cool to ensure high reliability and long life.

Lumenox floodlights are fitted with our own custom built driver which ensures the driver lasts as long as the LED and is more suited to the extremes of temperature encountered in an explosion-proof application.

Heatsinking and thermal management has been optimised using CFD (computational fluid dynamics) to ensure maximum heat dissipation, essential for reliable LED functionality and long life.


Features

- ATEX/IECEx approved for use in Zones 1,2,21 and 22
- Lightweight, robust and vibration resistant design
- High Light output, 3400 lm
- Instant Strike

F

- Robust, marine grade corrosion resistant alloy enclosure
- Universal 90V to 264V ac voltage range



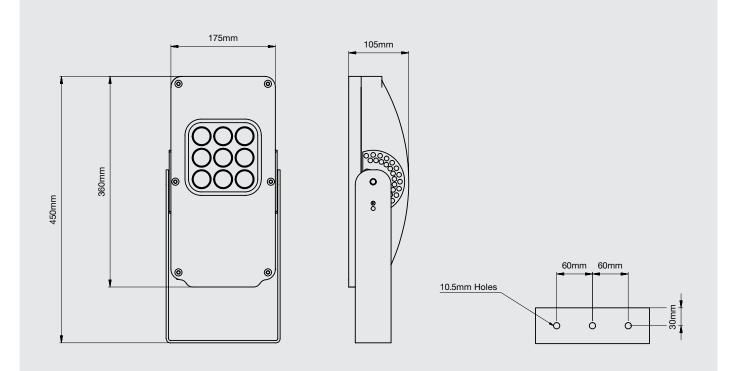

Carl Specification

Application	Oil & Gas, Petro-Chemical, Marine		Part Num	ber	
Certification	ATEX, IECEX II 2 G D Ex e mb IIC T6 Gb,	· · ·	Type LFX3-HO	Beam Pattern (N) Narrow	Cable Entrie (1) 2 x M20
	Ex tb IIIC T85°C Db, Ta = -20°C to +40°C			(M) Medium	(2) 2 x 1/2" N
Ingress Protection	IP66			(W) Wide	
Operating Temperature	-20°C to +70°C		Example LFX3-HO-M-1		
Weight	5.5 Kg				
Light Source	High Output LED				
Light Output	3,400 lm				
Colour Temperature	5700 K				
Colur Rendering Index (CRI)	>70				
Input Voltage	90V - 264V ac				
Current Consumption	250mA				
Enclosure Material	LM6 Alloy				
Estimated Life	> 50,000 hours				

LUMENOX

Unit 19, The Mansley Centre, Timothy's Bridge Road, Stratford upon Avon, Warwickshire CV37 9NQ