

885

Rotating Mirror Beacon



- Integrated flexible tube
- With 2 pole plug connection according to ISO 4165
- Elastic material prevents the beacon from breaking off
- Full rotating mirror functionality in compact form

TECHNICAL SPECIFICATIONS:

| | |
|--------------------------|--|
| Dimensions (Ø x Height): | 98 mm x 255 mm |
| Housing: | PC/ABS-Blend |
| Lens: | PC, transparent |
| Fixing: | Tube mounting |
| Connection: | 2 pole plug connection (according to ISO 4165) |
| Cable entry: | Cable diameter 5-7 mm |
| Installation position: | As required |
| Halogen bulb: | G 6.35 20 W 12 V/24 V |
| Mirror rotating rate: | c. 180 r.p.m. |
| Service life of drive: | > 5,000 hrs |
| Duty cycle: | 100 % |

Halogen bulb included in assembly.

ORDER SPECIFICATIONS:

| | 12 V ≈ | 24 V ≈ |
|---------------------|-------------------|-------------------|
| Voltage | | |
| Current consumption | 1.7 A | 1.0 A |
| red | 885 120 54 | 885 120 75 |
| green | 885 220 54 | 885 220 75 |
| yellow | 885 320 54 | 885 320 75 |
| blue | 885 520 54 | 885 520 75 |



Flange with counter-plug for electrical connection (accessory)

ACCESSORIES:

| | |
|--|-------------------|
| Flange with counter-plug for electrical connection | 975 826 20 |
|--|-------------------|


TECHNICAL DIAGRAMS:

see page 290



The flexible tube, made of an elastic material, is hard-wearing and prevents the beacon from breaking off

Sizes of Rotating Beacons

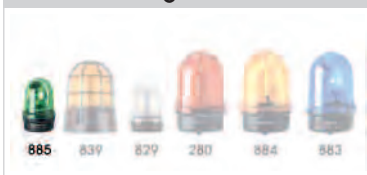

Technical Diagrams

