


## Multifunction handle

// TG-ÖS GR xx Order no.: 97155002

### Features/Options

- Green enabling push-button: 1 NC/1 NO contact
- Green and red LED
- Protection class IP 65
- With plug-in connector M12 x 1, 8-poles

### Dimensions

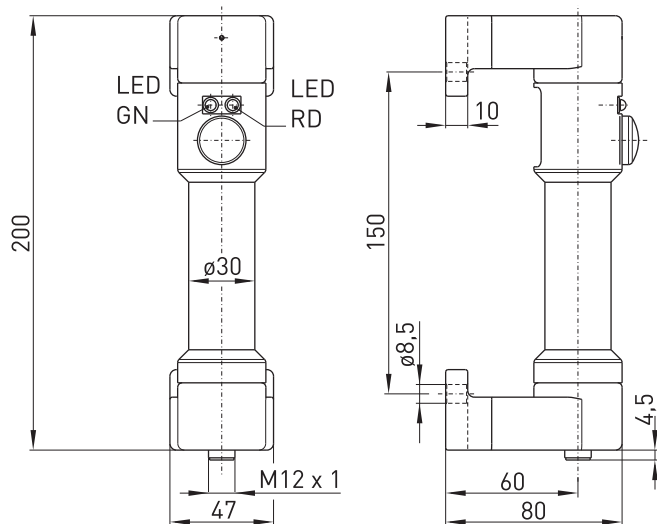

### Technical data


Standards	IEC/EN 60947-5-1
Enclosure	Glassfibre reinforced, shockproof thermoplastic, POM
Protection class	IP 65 per IEC/EN 60529
Termination	Plug-in connector, A-coded
$U_e$ LEDs	max. 24VDC +10%
$U_c$	0,1 VAC/DC ... 25VAC/42VDC
Rated switching current	max. 0,1 A AC/DC
Rated switching capacity	max. 0,6 W
Degree of pollution	3
Mechanical life	> 1 milion operations
Ambient temperature	-25 ... +55 °C

Errors and omissions excepted.

### Contact variants


#### TG-ÖS GR xx

#### LEDs



#### LEDs

#### Enabling push-button



#### Plug-in configuration (view from plug side)

