


Multifunction handle AS-Interface // TG-S GR x S-A Order no.: 97955907

Features/Options

- Grey start push-button
- Green and red LED

- Blue enabling push-button
- Protection class IP 65
- With plug-in connector M12 x 1, 4-poles, A-coded

Dimensions

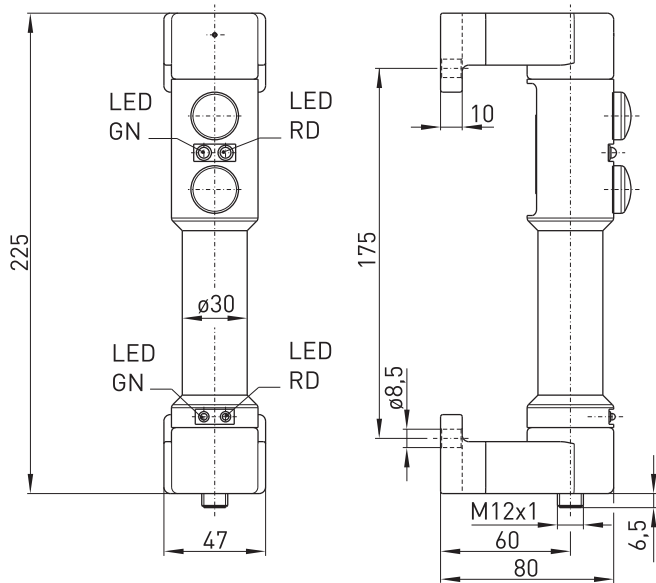

Technical data

Standards

IEC/EN 60947-5-1

Enclosure

Glassfibre reinforced, shockproof thermoplastic, POM

Protection class

IP 65 per IEC/EN 60529

operating voltage range

26,5V - 31,6V DC

standby current

< 25 mA

max. operating current

> 100 mA

Termination

Plug-in connector, A-coded

Degree of pollution

3

Mechanical life

> 1 milion operations

Ambient temperature

-25 ... +55 °C

Errors and omissions excepted.

Contact variants

