



- Zone 1 and 2
- Fully encapsulated

- Silicone free

i TECHNICAL SPECIFICATIONS:

Dimensions (L x H x W):	148 mm x 360 mm x 152 mm
Housing:	PC / ABS-Blend
Connection:	Cable 3 m, 2 x 0.75 mm ²
Fixing:	Bracket mounting, sound outlet facing downwards
Explosion protection	⊕ Ex II 2G Ex mb II T5
Approval:	BVS 03 ATEX E 118X



🛒 ORDER SPECIFICATIONS:

Voltage	24 V=	24 V~	48 V~	115 V~	230 V~
Voltage range	21,6 V ... 26,4 V	21,6 V ... 26,4 V	37,8 V ... 52,8 V	102,5 V ... 126,5 V (50 Hz)	108 V ... 131 V (60 Hz)
Current consumpt.	350 mA	450 mA	220 mA	205 mA	70 mA
	750 000 55	750 000 65	750 000 66	750 000 67	750 000 68




TECHNICAL DIAGRAMS:

see page 281




The Ex Signal Horn 750 warns of imminent danger in the chemical industry and paint shops




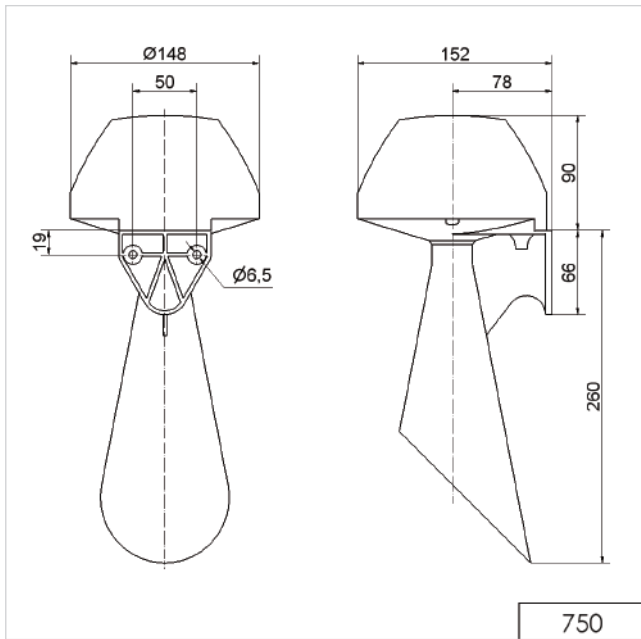


750

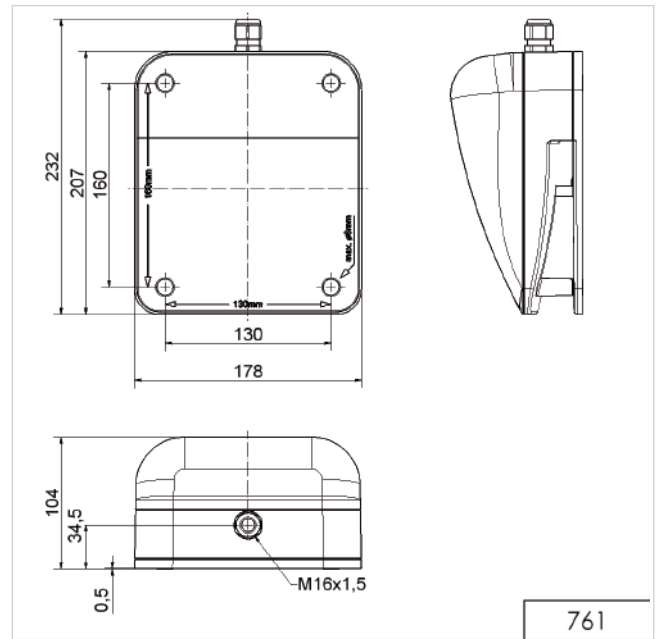


761

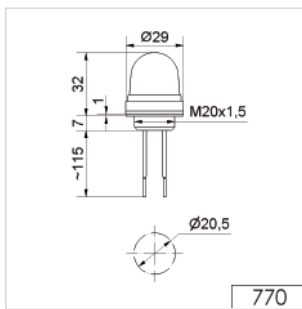

770

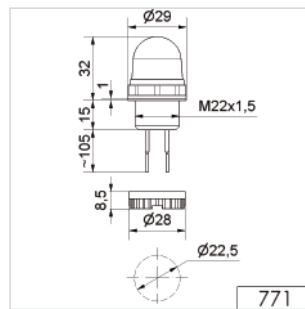

771

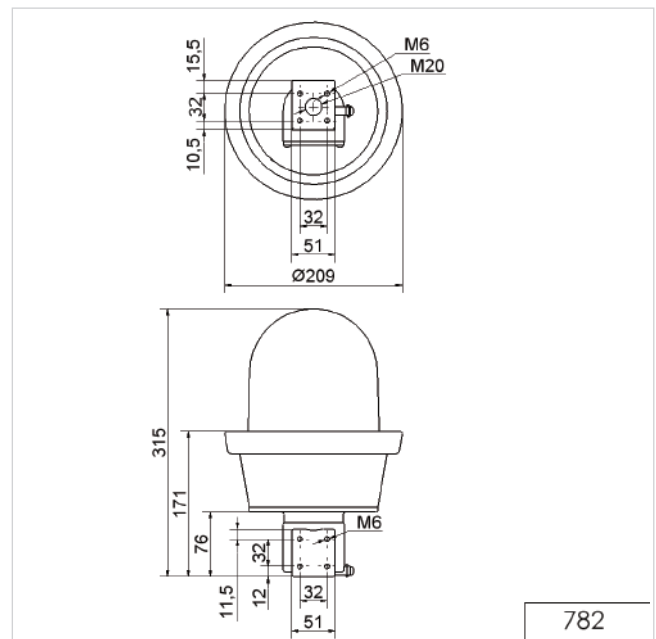

782

! ADDITIONAL INFORMATION:

You are welcome to request the technical diagrams in digital form. The relevant 3D models, instruction leaflets and connection diagrams can be obtained from us or downloaded from our homepage at any time.