


# Hydraulic pumps

## Air-hydraulic pump

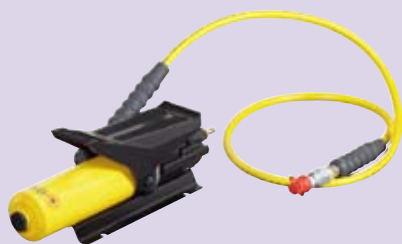

### Features

- For driving single cylinders.
- A compressed air connection of 7 bar is sufficient to generate with this pump an (hydraulic) operating pressure of 700 bar.
- No further connections necessary!
- Due to its low weight, suitable for mobile use.

### Product Description

- Easy foot pedal control
- Connection complete with high pressure hydraulic hose and quick release coupling

### Technical Data

- Oil feed rate: 0.5 l/min
- Hose length: 1,800 mm; 70.87"
- Operating pressure: 700 bar
- Air pressure: 7 bar
- Airflow: 250 l/min
- Oil capacity: 500 cm<sup>3</sup>

### Scope of Delivery

- 1 Air-hydraulic pump
- Hose
- Quick release coupling

Description	Weight		Order No.
	kg	lbs	
Air-hydraulic pump	8	17.64	<b>2612-7300-07-00</b>

## Electro-hydraulic pump 0220



### Features

- Hydraulic pump with 230V / 50 Hz
- For driving single cylinders
- Set operating pressure: 450 bar

### Product Description

Suitable for the operation of häwa hydraulic-cylinder, punches, profile cutters and cable crimping tools. With two settings for automatic- or inching mode.

- Operation with foot switch
- Connection of multiple devices through the switch valve; order no.: 2611-0003-03-00

### Technical Data

- Power supply: Schuko plug (safety plug)
- Finish: lacquered, RAL 2004 orange
- Operating voltage: 230 V / 50 Hz
- Power: 0.25 kW
- Oil feed rate: 0.41 l/min
- Operating pressure: 450 bar

### Scope of Delivery

- Electro-hydraulic pump
- With oil filling
- Foot switch
- High pressure hose with quick release coupling
- Power cable

Description	Weight		Order No.
	kg	lbs	
Electro-hydraulic pump 0220	27	59.54	<b>2611-0220-00-00</b>

## Electro-hydraulic pump 0380



### Features

- Hydraulic pump with 400V / 50 Hz
- For driving single cylinders
- Set operating pressure: 450 bar

### Product Description

Suitable for the operation of häwa hydraulic-cylinder, punches, profile cutters and cable crimping tools. With two settings for automatic- or inching mode.

- Operation with foot switch
- Connection of multiple devices through the switchvalve; order no.: 2611-0003-03-00

### Technical Data

- Power supply: Cekon plug 5-pin 16A
- Finish: lacquered, RAL 2004 orange
- Operating voltage: 400 V / 50 Hz
- Power: 0.55 kW
- Oil feed rate: 1.17 l/min
- Operating pressure: 450 bar

### Scope of Delivery

- Electro-hydraulic pump
- With oil filling
- Foot switch
- High pressure hose with quick release coupling
- Power cable

Description	Weight		Order No.
	kg	lbs	
Electro-hydraulic pump 0380	32	70.56	<b>2611-0380-00-00</b>